

ACCESSORIES FOR WATER SYSTEMS

RESIDENTIAL - IRRIGATION - WATER TREATMENT

Pressure Gauge Dry





Pressure Gauge Liquid Filled





- Steel Casing
- Lower Mount

MODEL	CONNECTION	CASING	DIAMETER	PRESSURE RANGE	BOX QUANTITY	WEIGHT [Ib]	
PG060L20D4M	1/4" LOWER MOUNT	METAL	2"	0 - 60 PSI	100	0.21	
PG100L20D4M	1/4" LOWER MOUNT	METAL	2"	0 - 100 PSI	100	0.21	

Pearl

Pressure Gauge DRYSteel Casing

Back Mount

Lower Mount





> Pear

MODEL	MODEL CONNECTION		DIAMETER	PRESSURE BOX RANGE QUANTITY		WEIGHT [Ib]
PG060B20D4M	1/4" BACK MOUNT	METAL	2"	0 - 60 PSI	100	0.23
PG100B20D4M	a100B20D4M 1/4" BACK MOUNT		2"	0 - 100 PSI	100	0.23

Pressure Gauge LIQUID FILLED
 STAINLESS STEEL or METAL Casing



🗘 Pearl

MODEL	CONNECTION	CASING	DIAMETER	PRESSURE RANGE	BOX QUANTITY	WEIGHT [lb]
PG100L20L4M	1/4" LOWER MOUNT	METAL	2"	0 - 100 PSI	50	0.34
PG160L20L4M	1/4" LOWER MOUNT	METAL	2"	0 - 160 PSI	50	0.34
PG160L25L4S	1/4" LOWER MOUNT	STAINLESS STEEL	2.5"	0 - 160 PSI	50	0.42
PG200L25L4S	1/4" LOWER MOUNT	STAINLESS STEEL	2.5"	0 - 200 PSI	50	0.44
PG300L25L4S	1/4"LOWER MOUNT	STAINLESS STEEL	2.5"	0 - 300 PSI	50	0.44

- Pressure Gauge LIQUID FILLED
- Stainless Steel Casing
 Back Mount



🗘 Pearl





PUMP PROTECTION - EFFICIENCY - ENERGY SAVER - COMFORT

Pressure Gauge Dry for Testing



• Pressure Gauge Dry

- Steel Casing
- Lower Mount





MODEL	CONNECTION	CASING	DIAMETER	PRESSURE RANGE	BOX QUANTITY	WEIGHT [Ib]
PGTSTL20D7M	3/4 HOSE	METAL	2"	0 - 160	50	0.3

Pressure Switches - Pearl

í a

- Pressure Switch for WATER APPLICATIONS
- Stainless Steel ConnectionFemale Connection


Adjustable Differential






MODEL	CONNECTION	APPLICATION	PRESSURE RANGE	BOX QUANTITY	WEIGHT [Lb]
ARPS24MFU 1/4" FEMALE		FRESH WATER	20 - 40 PSI	50	0.9
ARPS35MFU	1/4" FEMALE	FRESH WATER	30 - 50 PSI	50	0.9
ARPS46MFU	1/4" FEMALE	FRESH WATER	40 - 60 PSI	50	0.9

Pressure Switches - Square D



- Female Connection
- Adjustable Differential

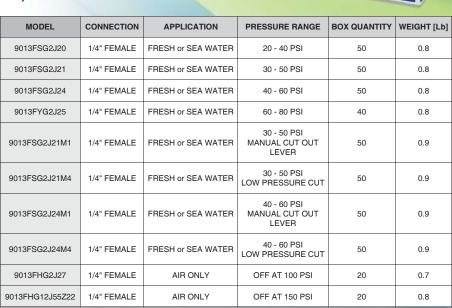

SQUARE D



RESIDENTIAL - IRRIGATION - WATER TREATMENT

Pressure Switches -Square D



 Pressure Switch for HEAVY DUTY APPLIC. 	ATI
--	-----

Stainless Steel Connection



- Female Connection
- Adjustable Differential

MODEL	CONNECTION	APPLICATION	PRESSURE RANGE	BOX QUANTITY	WEIGHT [Lb]
9013GSG2J20	1/4" FEMALE	WATER OR AIR	20 - 40 PSI	1	2.0
9013GSG2J21	1/4" FEMALE	WATER OR AIR	30 - 50 PSI	1	2.0
9013GSG2J24	1/4" FEMALE	WATER OR AIR	40 - 60 PSI	1	2.0
9013GSG2J33	1/4" FEMALE	WATER OR AIR	50 - 70 PSI	1	2.0
9013GSG2J25	1/4" FEMALE	WATER OR AIR	60 - 80 PSI	1	2.0

Pulsation Plugs for Square D Pressure Switches



MODEL	MODEL CONNECTION		PRESSURE RANGE	BOX QUANTITY	WEIGHT [Ib]
1530S6G1	N/A	STANDARD	PULSATION PLUGS FOR SQUARE D	20	0.01

Float Switches





Suitable for 115V or 230V

• Contact - NO MERCURY • Cable in NEOPRENE

• Float Switches with Plastic Shell



TYPE OF STARTING CURRENT CURRENT CURRENT WEIGHT OPERATION OPERATION OPERATION (1b) CABLE [ft] TYPE OF WIRE MODEL

	[]		1 200	[A]	[A]	WEIGHT		.	[]
FSKEY25PBSU	25	SJOW 3X16 AWG	PIGGY BACK SWITCH	78	16 at 115V	NO	PUMP DOWN	15	2.6
FSKEY10DWU	10	SJOW 3X18 AWG	DIRECT WIRING	72	14 at 115V 12 at 230V	YES	PUMP UP OR PUMP DOWN	45	1.8
FSKEY15DWU	15	SJOW 3X18 AWG	DIRECT WIRING	72	14 at 115V 12 at 230V	YES	PUMP UP OR PUMP DOWN	45	2.0
FSKEY20DWU	20	SJOW 3X18 AWG	DIRECT WIRING	72	14 at 115V 12 at 230V	YES	PUMP UP OR PUMP DOWN	45	2.0
FSKEY25DWU	25	SJOW 3X18 AWG	DIRECT WIRING	72	14 at 115V 12 at 230V	YES	PUMP UP OR PUMP DOWN	45	2.9

PUMP PROTECTION - EFFICIENCY - ENERGY SAVER - COMFORT

Flexible Hose



	External	Steel Twisted				
A	MODEL	CONNECTION	APPLICATION	DESCRIPTION	BOX QTY.	WEIGHT [Lb]
*	ARFH061-1	1"M x 1"F	WATER	23" (600mm) LENGTH - WITH INTERNAL HOSE IN RUBBER- EXTERNAL STEEL TWISTED	50	0.8
	ARFH101-1	1"M x 1"F	WATER	39" (1000mm) LENGTH - WITH INTERNAL HOSE IN RUBBER- EXTERNAL STEEL TWISTED	25	1.2

D Poarl

Brass Fittings for Pump Assemblies

311:



• 5 Way Connection Bronze LOW LEAD

• Flexible Hose

Galvanized Steel



MODEL	CONNECTION	APPLICATION	DESCRIPTION	BOX QUANTITY	WEIGHT [Lb]
AR5W82U	1"M x 1"F x 1"F x 1/4" F x 1/4"M	WATER	5 WAY BRASS FITTING 1" 3.22" (82mm) TALL	10	0.5



MODEL	CONNECTION	APPLICATION	DESCRIPTION	BOX QUANTITY	WEIGHT [Lb]
0915008NPT	1/4"	WATER	BALL VALVE, STAINLESS STEEL 316, 1/4"M x 1/4"F, NPT THREAD	100	0.1
0910015NPT	3/4"	3/4" WATER BALL VALVE, STAINLESS STEEL 316, 3/4", NPT THREAD		50	0.5
0910025NPT 1"		WATER	BALL VALVE, STAINLESS STEEL 316, 1", NPT THREAD	30	1.5
0910032NPT	11/4"	WATER	BALL VALVE, STAINLESS STEEL 316, 11/4", NPT THREAD	20	2.2
0910040NPT	11/2"	WATER	BALL VALVE, STAINLESS STEEL 316, 11/2", NPT THREAD	12	3.5
0910050NPT	2"	WATER	BALL VALVE, STAINLESS STEEL 316, 2", NPT THREAD	8	5.6

LOW LEAD BRASS

MODEL CONNECTION APPLICATION BOX QUANTITY WEIGHT [Lb] DESCRIPTION UNION BALL VALVE, BRASS, 4106025NPT 1" WATER 24 1.4 1", NPT THREAD UNION BALL VALVE, BRASS, WATER 4106032NPT 11/4" 12 2.2 11/4", NPT THREAD UNION BALL VALVE, BRASS, 4106040NPT WATER 12 11/2" 2.8 11/2", NPT THREAD UNION BALL VALVE, BRASS, 2", NPT THREAD 0910050NPT 2" WATER 6 5.6

D Pearl

Union Ball Valve

Ball Valves




PUMP PROTECTION - EFFICIENCY - ENERGY SAVER - COMFORT

Check Valve Stainless Steel



• STAINLESS STEEL AISI 316 Dear

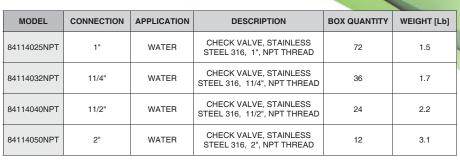

Check Valve Brass



LOW LEAD BRASS



MODEL	CONNECTION	APPLICATION	DESCRIPTION	BOX QUANTITY	WEIGHT [Lb]
4114025NPT	1"	WATER	CHECK VALVE, LOW LEAD BRASS, 1", NPT THREAD	72	1.0
4114032NPT	11/4"	WATER	CHECK VALVE, LOW LEAD BRASS, 11/4", NPT THREAD	36	1.5
4114040NPT	11/2"	WATER	CHECK VALVE, LOW LEAD BRASS, 11/2", NPT THREAD	24	2.2
4114050NPT	2"	WATER	CHECK VALVE, LOW LEAD BRASS, 2", NPT THREAD	12	2.9

Bushings



Reduced Coupling



• STAINLESS STEEL AISI 316



MODEL	CONNECTION	APPLICATION	DESCRIPTION	BOX QUANTITY	WEIGHT [Lb]
824102520NPT	1" M X 3/4"F	WATER	BUSHING, STAINLESS STEEL, NPT THREAD	300	0.3
824103225NPT	11/4" M X 1"F	WATER	BUSHING, STAINLESS STEEL, NPT THREAD	110	0.3
824104032NPT	11/2" M X 11/4"F	WATER	BUSHING, STAINLESS STEEL, NPT THREAD	70	0.4

• STAINLESS STEEL AISI 316



Pearl

Coupling



• STAINLESS STEEL AISI 316

Pearl

MODEL	CONNECTION	APPLICATION	DESCRIPTION	BOX QUANTITY	WEIGHT [Lb]
8270025NPT	1" F X 1"F	WATER	STAINLESS STEEL COUPLING, NPT THREAD	180	0.5
8270032NPT	11/4" F X 11/4"F	WATER	STAINLESS STEEL COUPLING, NPT THREAD	85	0.6
8270040NPT	11/2" F X 11/2"F	WATER	STAINLESS STEEL COUPLING, NPT THREAD	70	0.5

Nipples



• STAINLESS STEEL AISI 316

Pearl

MODEL	CONNECTION	APPLICATION	DESCRIPTION	BOX QUANTITY	WEIGHT [Lb]
8280025NPT	1" M X 1"M	WATER	STAINLESS STEEL NIPPLE, NPT THREAD	140	0.3
8280032NPT	11/4" M X 11/4"M	WATER	STAINLESS STEEL NIPPLE, NPT THREAD	80	0.4
8280040NPT	11/2" M X 11/2"M	WATER	STAINLESS STEEL NIPPLE, NPT THREAD	20	0.5
8280050NPT	2" M X 2"M	WATER	STAINLESS STEEL NIPPLE, NPT THREAD	45	0.8

Union Male - Female



• STAINLESS STEEL AISI 316

MODEL	CONNECTION	APPLICATION	DESCRIPTION	BOX QUANTITY	WEIGHT [Lb]
8341025NPT	1" M X 1"F	WATER	STAINLESS STEEL UNION MALE-FEMALE	70	0.8
8341032NPT	11/4" M X 11/4"F	WATER	STAINLESS STEEL UNION MALE-FEMALE	40	1.0
8341040NPT	11/2" M X 11/2"F	WATER	STAINLESS STEEL UNION MALE-FEMALE	20	1.0
8341050NPT	2" M X 2"F	WATER	STAINLESS STEEL UNION MALE-FEMALE	10	1.5

Pearl



3000 W. 16 Ave. Miami, FL 33012 TEL: (954) 474 9090 FAX: (954) 889 0413

PUMP PROTECTION - EFFICIENCY - ENERGY SAVER - COMFORT